


INEX>EXPRESS™

TIMBER OR STEEL FRAME WITH HORIZONTAL SHEETS : FRL 30/30/30 & BAL-FZ

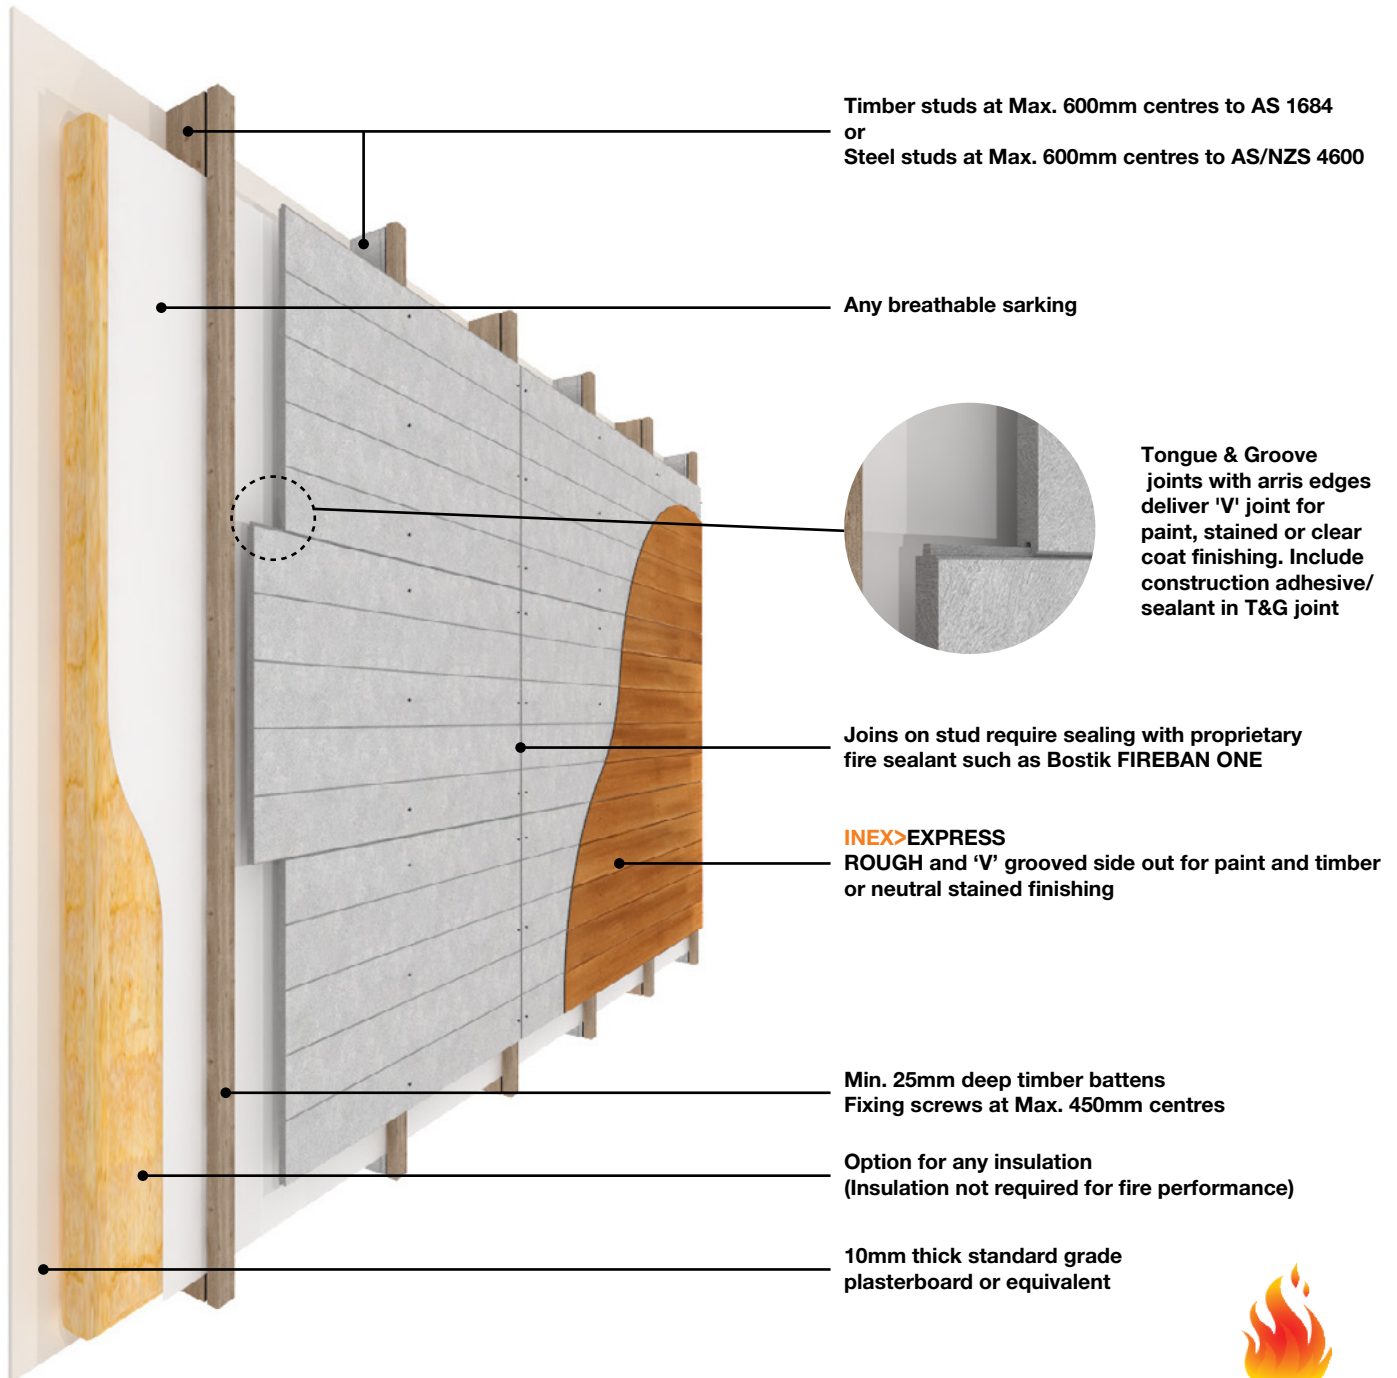

Timber studs at Max. 600mm centres to AS 1684
or
Steel studs at Max. 600mm centres to AS/NZS 4600

Any breathable sarking

Tongue & Groove joints with arris edges deliver 'V' joint for paint, stained or clear coat finishing. Include construction adhesive/sealant in T&G joint

Joins on stud require sealing with proprietary fire sealant such as Bostik FIREBAN ONE

INEX>EXPRESS
ROUGH and 'V' grooved side out for paint and timber or neutral stained finishing

Min. 25mm deep timber battens
Fixing screws at Max. 450mm centres

Option for any insulation
(Insulation not required for fire performance)

10mm thick standard grade
plasterboard or equivalent


Achieves FRL 60/60/60 from outside only when tested to AS 1530.4-2014
Meets AS 3959-2018 Section 9 (BAL-FZ) via testing to AS 1530.4-2014



INEX>BOARDS™
FLOORING & CLADDING SOLUTIONS

INEX > EXPRESS™

TIMBER OR STEEL FRAME WITH HORIZONTAL SHEETS : FRL 30/30/30 & BAL-FZ

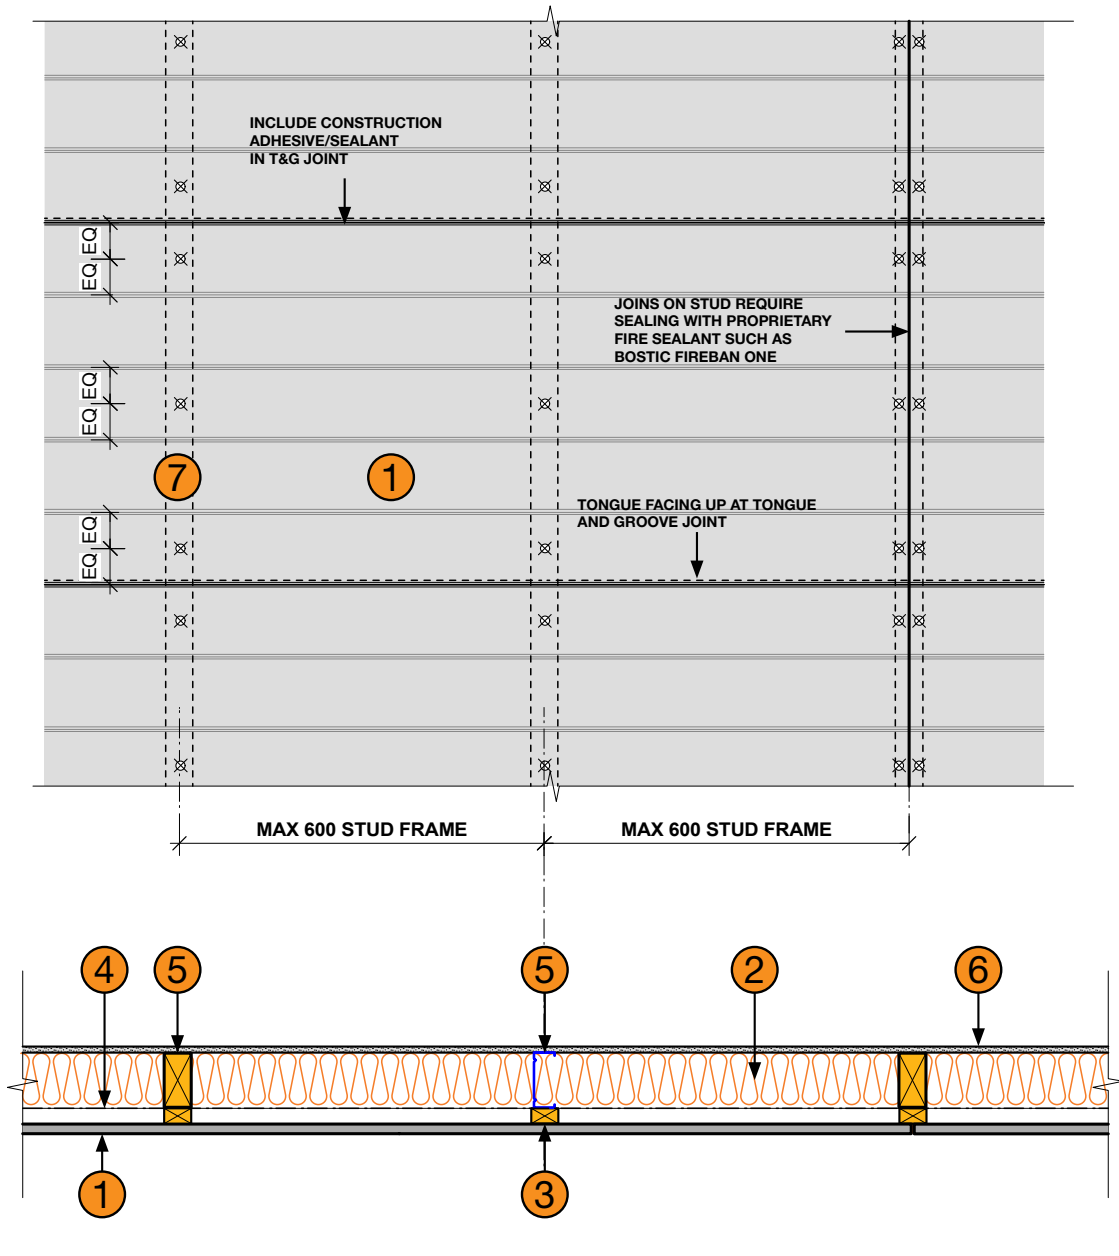

- | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>1 INEX > EXPRESS16</p> <p>2 Any insulation
<i>(Insulation not required for fire performance)</i></p> <p>3 Min. 25mm deep timber battens
Fixing screws at Max. 450mm centres</p> <p>4 Any breathable sarking</p> | <p>5 Steel studs at Max. 600mm centres to AS/NZS 4600
or
Timber studs at Max. 600mm centres to AS 1684
<i>(Both drawn)</i></p> <p>6 10mm thick standard grade plasterboard or
equivalent</p> <p>7 10g Min. class 3 galvanised self driller counter
sinking screws
<i>BREMICK SWRC3100352</i>
or
<i>BREMICK vortexfibre SURC3500302</i></p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

NOTES

Refer also to INEX > EXPRESS Technical Sheet for fixing details